

**CB Series**


- Ultra low impedance, high ripple current, high voltage
- Load life of 3000 hours at 105°C
- RoHS Compliant



◆ 规格表 Specifications

项目 Items	特性参数 Characteristics	
使用温度范围 Category Temperature Range	-55 ~ +105°C	
额定工作电压范围 Rated Voltage Range	35 ~ 250 V	
静电容量允许偏差 Capacitance tolerance	±20%(M) (at 20°C, 120Hz)	
漏电流 Leakage Current	施加额定工作电压2分钟后读数, 小于或等于规格值 (20°C) I ≤ 0.15CV 或 120μA (取大值) (The bigger) After 2 minutes applied for rated voltage at 20°C, less than or equal to the specified value.	
损耗角正切值 tanδ Dissipation Factor	小于或等于规格 Less than or equal to the specified (at 20°C, 120Hz)	
温度特性 Low Temperature Characteristics (Max. Impedance Ratio)	Z(-25°C)/Z(+20°C)	≤ 1.25
	Z(-55°C)/Z(+20°C)	≤ 1.25
	(100KHz)	
耐久性 Endurance	105°C 施加额定工作电压3000小时, 恢复到20°C后, 产品性能应满足以下要求 The specifications listed below shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 3000 hours at 105°C.	
	Appearance	No significant damage
	Capacitance change	≤ ±20% of the initial value
	D.F.(tanδ)	≤ 150% of the specified value
	ESR	≤ 150% of the specified value
耐湿负荷特性 Damp Heat (Steady State)	在60°C 温度, 湿度90%~95%RH的环境中, 施加额定电压1000小时后, 恢复到20°C后, 产品性能应满足以下要求 The specifications listed below shall be met when the capacitors are restored to 20°C after the rated voltage is applied for 1000 hours at 60°C, 90%~ 95% RH.	
	Appearance	No significant damage
	Capacitance change	≤ ±20% of the initial value
	D.F.(tanδ)	≤ 150% of the specified value
	ESR	≤ 150% of the specified value
浪涌电压特性 (Surge Voltage)	浪涌电压=额定电压* 1.15(V) Surge Voltage=Rated voltage * 1.15(V) 在105°C环境中, 按充电30秒, 放电5分30秒, 连续施加浪涌电压1000次(Rc=1kΩ), 待恢复后测试, 应满足以下要求 The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltages specified at 105°C for 30 seconds through a protective resistor (Rc=1kΩ) and discharge for 5 minutes 30 seconds	
	Appearance	No significant damage
	Capacitance change	≤ ±20% of the initial value
	D.F.(tanδ)	≤ 150% of the specified value
	ESR	≤ 150% of the specified value
	Leakage current	≤ The specified value

◆ 外形图 Dimensions (mm)

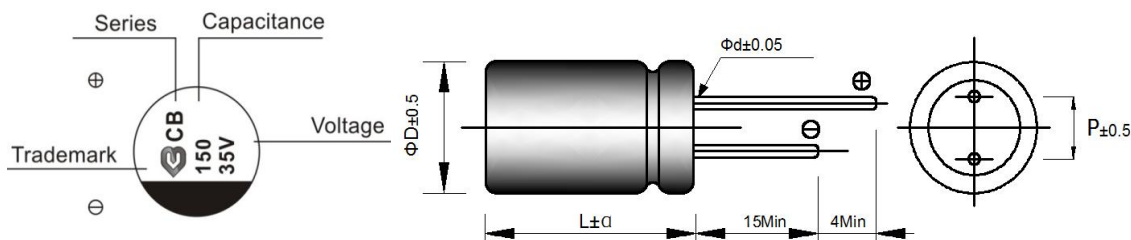

ΦD	5	6.3	8	10
P	2	2.5	3.5	5
Φd	0.5	0.5	0.6	0.6
a	L < 16mm: 1.0			
	L ≥ 16mm: 2.0			

## CB Series

## ◆ 尺寸与最大纹波电流一览表 Standard Ratings

Rated voltage (V)	Rated capacitance(uF)	Case size $\Phi D^*L$ (mm)	$\tan\delta$ (120Hz)	ESR(m $\Omega$ ) at 20 $^{\circ}$ C, 100 KHz	Rated ripple current (mA $r_{ms}$ /105 $^{\circ}$ C/100kHz)
35 (1V)	22	6.3*8	0.12	20	850
	33	6.3*8	0.12	19	850
	47	8*8	0.12	17	2100
	150	8*12	0.12	15	2450
	220	10*12	0.12	15	2900
50 (1H)	22	6.3*8	0.12	19	2100
	47	8*12	0.12	15	2900
	68	10*12	0.12	15	2850
	120	10*12	0.12	15	2850
63 (1J)	22	8*8	0.12	21	2100
	33	8*12	0.12	19	2450
	82	10*12	0.12	17	850
80 (1K)	10	8*8	0.12	24	2050
	12	8*12	0.12	23	2150
	22	10*12	0.12	21	2450
100 (2A)	15	8*12	0.12	24	2100
	22	10*12	0.12	22	2250
	33	10*12	0.12	21	2480
160 (2C)	10	8*12	0.12	58	1200
	15	10*12	0.12	49	1355
	22	10*12	0.12	46	1850
200 (2D)	8.2	8*12	0.12	64	1050
	15	10*12	0.12	64	1280
220 (2P)	6.8	8*12	0.12	64	755
	10	10*12	0.12	64	920
250 (2E)	3.3	8*12	0.12	82	480
	6.8	10*12	0.12	74	585
	8.2	10*12	0.12	68	645

## ◆ 纹波电流修正系数 Rated Ripple Current Coefficient

频率 Frequency(Hz)	120Hz $\leq f < 1$ kHz	1kHz $\leq f < 10$ kHz	10kHz $\leq f < 100$ kHz	100kHz $\leq f < 500$ kHz
系数 Coefficient	0.05	0.30	0.70	1.00